


BarLift Submittal Drawing

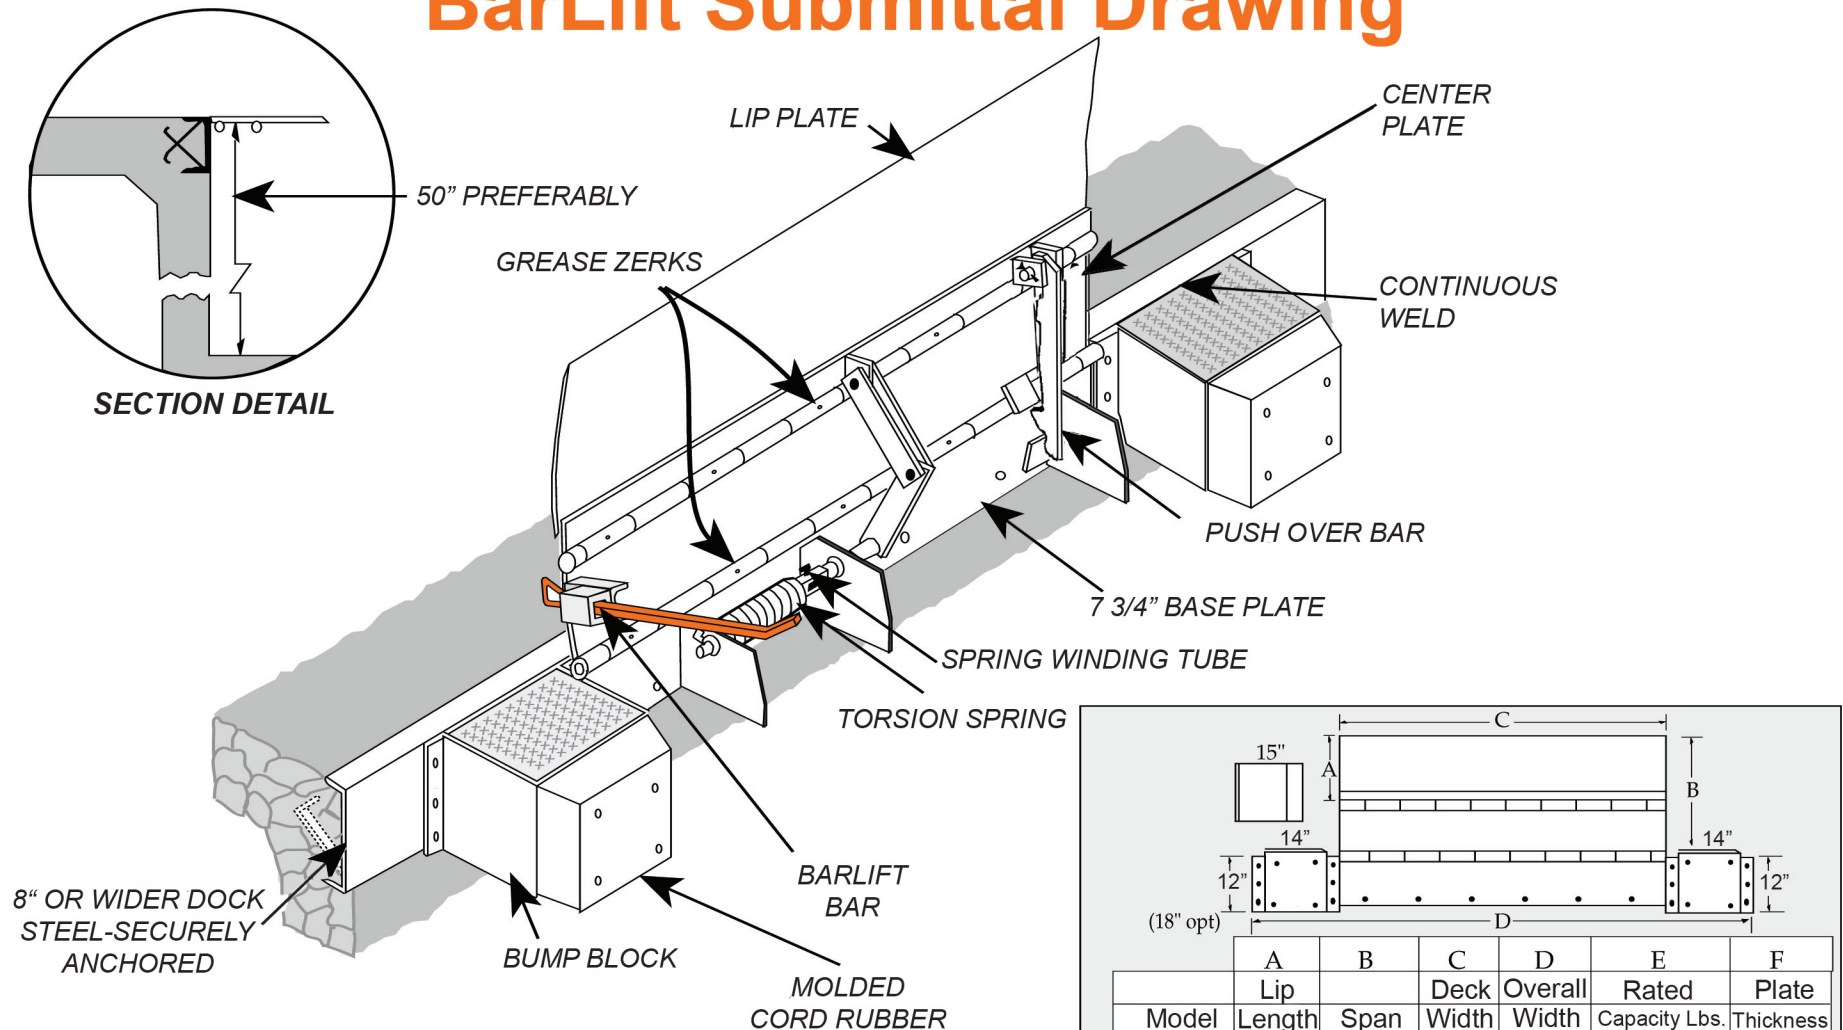

SECTION DETAIL

50" PREFERABLY

8" OR WIDER DOCK STEEL-SECURELY ANCHORED

BUMP BLOCK

BARLIFT BAR
MOLDED CORD RUBBER

NOTES: Deck & Lip - 55,000 lb. min. yield steel.
30,000 lb. Capacity, in stored position.

30,000 lb. Capacity Units Available
35,000 lb. Capacity Units Available
40,000 lb. Capacity Units Available



PO Box 338 • Spring Hill, Tennessee 37174
931.486.2296 • 800.251.3382 • Fax: 931.486.0316
www.pioneerleveler.com

	A	B	C	D	E	F
	Lip	Span	Deck Width	Overall Width	Rated Capacity Lbs.	Plate Thickness
Model	Length	Span	Width	Width	Capacity Lbs.	Thickness
BL66	15"	27 3/4"	66"	104"	20,000	3/8"
BL66H	15"	27 3/4"	66"	104"	25,000	7/16"
BL66-17	17"	29 3/4"	66"	104"	20,000	3/8"
BL72	15"	27 3/4"	72"	110"	20,000	3/8"
BL78	15"	27 3/4"	78"	116"	20,000	3/8"
BL84	15"	27 3/4"	84"	122"	20,000	3/8"

SPECIFY JOB REQUIREMENTS FROM CHART

JOB

Pioneer reserves the right to make product improvement at any time without prior notice.